

Shallow Surface Module

7200

versatile design

Shallow design surface module available in 1x2, 1x4, 1x8, 2x2, 2x4, & metric sizes in 2, 3, 4, 6, and 8 lamp configurations in T8, T5, and BIAx. End and side seams are welded and filled to provide the appearance of a smooth continuous channel. TS Lens option uses 32mm ledge. Optional glare dampening ribbed aluminum regressed frame. Door frame is secured by rotary cam latches. For surface and pendant mounting individually or in continuous rows.

Available with specular aluminum reflector (87% reflectance). high reflective white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

Housing

Die formed heavy gauge steel housing welded for rigidity and structural stability.

Electrical

Energy saving electronic ballasts comply with Federal Energy Efficiency standards.

Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 50-60HZ (UNV) unless specified otherwise.

Shielding

100% virgin acrylic prismatic is standard. Consult options for other shieldings.


Finish

All metal parts are phosphate coated and painted after fabrication with baked white enamel electrostatically applied, providing a durable finish with a minimum 89% reflectance.

Certification

All units bear UL label. Made in U.S.A. ARRA and BAA compliant. 5 year warranty.

PROJECT	
FIXTURE	
FIXTURE	
APPROVED BY	DATE
NOTES	

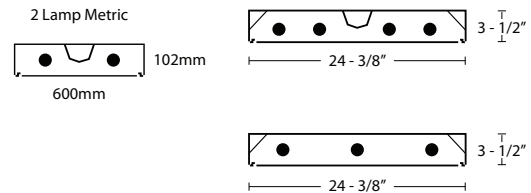

Model	Size	Lamp Quantity	Wattage Type	Voltage
7200	1 x 2 unit	2	17T8	120 277 UNV
		2	12T5	
		2	24T5HO	
	1 x 4 unit	2, 3 or 4	32T8	
		2, 3 or 4	28T5	
		2, 3 or 4	54T5HO	
	2 x 2 unit	2	32U6	
		2 or 3	31U 1-5/8	
		2 or 3	40BX	
		2, 3 or 4	14T5	
		2, 3 or 4	17T8	
	2 x 4	2, 3, 4 or 6	28T5	
2, 3, 4 or 6		32T8		
2, 3, or 4		54T5HO		
Metric	600m x 600m	2	14T5	230v 50hz
M7200	600m x 600m	2	24T5 HO	230v 50hz

*Dimensions are subject to change. For critical applications, verify all dimensions with RLE.

Options

- EM** Emergency 1400
- DM** Dimming (0-10v)
- SA87** Specular Aluminum Reflector
- SA95** High Efficiency Specular Aluminum Reflector
- WH92** High Reflective White
- 7200R** Prefix for Ribbed Glare Dampening Regressed Aluminum Door
- OPAL** Opal Lens
- 125A12** 125" Thick Pattern 12 Lens
- TS** Tilt & Shift Lens/32 mm ledge
- DMP** Dual 9.525mm Pendants 254mm on Center Spacing 432 mm

Optional Reflector Types