




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

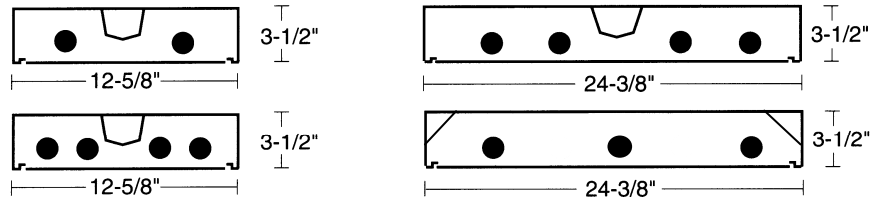

ORDERING

Shallow design surface module available in 1x2, 1x4, 1x8, 2x2, 2x4, & 4x4 sizes in 2, 3, 4, 6, and 8 lamp configurations in T8, T5, and BIAx. End and side seams are welded and filled to provide the appearance of a smooth continuous channel. Flush steel doorframe is standard. Optional glare dampening ribbed aluminum regressed frame. Door frame is secured by rotary cam latches. For surface and pendant mounting individually or in continuous rows. Available with specular aluminum reflector (87% reflectance) high reflective white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel housing welded for rigidity and structural stability.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

100% virgin acrylic prismatic is standard. Consult option sheet for other shieldings.

FINISH

All metal parts are phosphate coated and painted after fabrication with baked white enamel electrostatically applied providing a durable finish with a minimum 89% reflectance.

CERTIFICATION

All units bear UL label. Made in U.S.A. ARRA and BAA compliant.

MODEL	SIZE	LAMP QTY	WATTAGE TYPE	VOLTAGE
7200	1x2 unit	2	17T8	120
		2	14T5	277
		2	24T5HO	UNV
	1x4 unit	(2, 3 or 4)	32T8	
		(2, 3 or 4)	28T5	
		(2, 3 or 4)	54T5HO	
	2x2 unit	2	32U6	
		(2 or 3)	31U 1-5/8	
		(2 or 3)	40BX	
		(2, 3, or 4)	14T5	
	2x4 unit	(2, 3, or 4)	17T8	
		(2, 3, or 4)	24T5HO	
(2, 3, 4 or 6)		28T5		
2x4 unit	(2, 3, 4 or 6)	32T8		
	(2, 3, or 4)	54T5HO		
4x4 unit	(4, 6, or 8)	32T8		

OPTIONS:

- EM - Emergency
- DM - Dimming (Specify Type)
- SA87 – Specular Aluminum Reflector
- SA95 – High Efficiency Specular Aluminum Reflector
- WH92 – High Reflective White
- Prefix 7200R – Ribbed Glare Dampening Regressed Aluminum Door
- OPAL – Opal Lens
- 125A12 – .125" Thick Pattern 12 Lens



JOB NAME:
FIXTURE TYPE:
MODEL NO: