


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

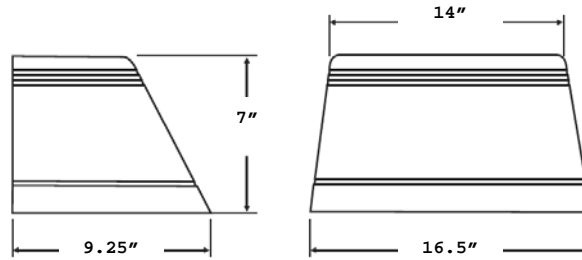

ORDERING

Ideal for parking areas, entrances, walkways, underpasses, loading docks, recreation areas, and tunnels. Heavy-duty die-cast aluminum construction. Heat and impact resistant tempered glass lenses. Powder coated finish on cast aluminum housing. One piece designed anodized aluminum reflector for optimum light efficiency. Silicon rubber seal prevents leakage. Available as downlight only or up and downlight. Lamping up to 150W MH, 150W HPS and compact fluorescent up to 42 watt available.

HOUSING

Heavy-duty die cast aluminum housing.

ELECTRICAL

Optimized for 150W PSMH and 150W HPS. Standard with 120V, 277V, or Multi-tap ballast. High Power Factor and other voltages/lamp options are also available.

FINISH

Powder coated architectural bronze is standard. Custom colors are available upon request.

CERTIFICATION

All units bear UL label. Listed for wet location. Made in U.S.A.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
CWPB	70	PSMH-	120
	100	Pulse Start	277
	150	Metal Halide	480
	100	HPS-	MULTI
	150		
	70	IND-	
		Induction	
	(1 or 2) 26	CF- Compact Fluorescent	120
	(1 or 2) 32		277
	(1 or 2) 42		UNV

OPTIONS:

EM – 90 Minute Remote Battery Back-Up (For Compact Fluorescent Only)

PC – Photocell

VS – Vandal Shield

TP – Tamperproof hardware

GLR – Fusing

QZ – Quartz Restrike

CC – Custom Color

JOB NAME:
FIXTURE TYPE:
MODEL NO:

